



Cordless Flashlight ML007G 40Vmax




40Vmax

Li-ion




Long beam distance
Up to **640 m**
Spot mode

4 lighting modes



	<p>Spot mode Luminous flux 600 lm</p>
---	---



	<p>Spot + Flood mode Luminous flux 1,250 lm</p>
---	---




	<p>Flood mode Luminous flux 1,000 lm</p>
---	--



	<p>Strobe mode</p>
---	---------------------------



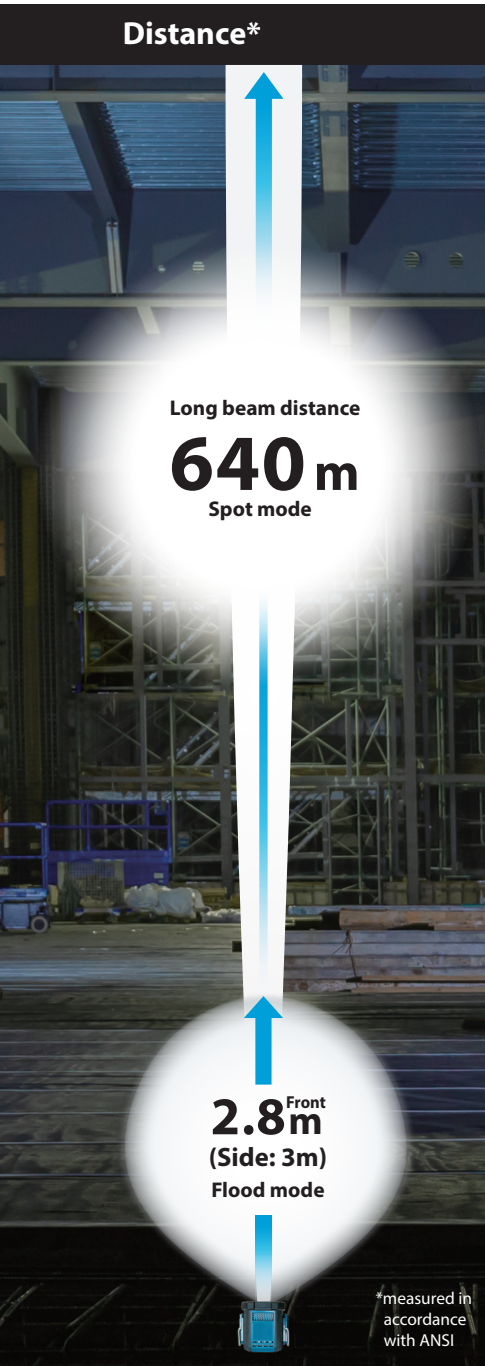

Flashlight head swivels 90 degrees



Daylight white
Color temperature of approx 5,000K

On/off switch

4 lighting modes

Press the mode switch to cycle

- **Spot** (1 lamp)
- ↓
- **Spot + Flood** (4 lamp)
- ↓
- **Flood** (5 lamp)

Strobe

Press and hold the lighting mode selection button to start this mode.



Battery capacity warning function

automatically notifies the user about reduction in battery capacity with the decrease of illuminance. (Only one LED is on for notification.)

Hook



Hand strap with metal strap hook



Continuous run time

Battery	BL4020	BL4025	BL4040	BL4050F	BL4080F
Spot	5.5 h	6.5 h	10 h	14 h	22 h
Spot + Flood	3.5 h	4.5 h	7.5 h	10 h	16 h
Flood	5.5 h	6.5 h	10 h	14 h	22 h
Strobe	5.5 h	6.5 h	10 h	14 h	22 h

XPT



Accessories

Hand strap with metal strap hook
Part No. GM0002373



Charging Time

	Fast Charging	
	DC40RA	DC40RC
*1BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min
*1BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Flashlight

ML007G 40Vmax

Illuminance	Spot / Flood / Spot-Flood: 82,000 / 520 / 60,000 lx
Luminous Flux	Spot / Flood / Spot-Flood: 600 / 1,000 / 1,250 lm
Dimensions (L x W x H)	w/ BL4020 / BL4025: 323 x 120 x 118 mm (12-3/4 x 4-3/4 x 4-5/8") w/ BL4040: 330 x 120 x 133 mm (13 x 4-3/4 x 5-1/4") w/ BL4050F: 350 x 120 x 152 mm (13-3/4 x 4-3/4 x 6") w/ BL4080F: 370 x 120 x 152 mm (14-1/2 x 4-3/4 x 6")
Net weight	1.6 - 2.9 kg (3.5 - 6.4 lbs.)

Standard Equipment : Hand strap with metal strap hook

not covered by EPTA-Procedure

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202202