


Powered by Slide Li-ion Battery of Makita's New 10.8V Platform



Compact, high cutting efficiency

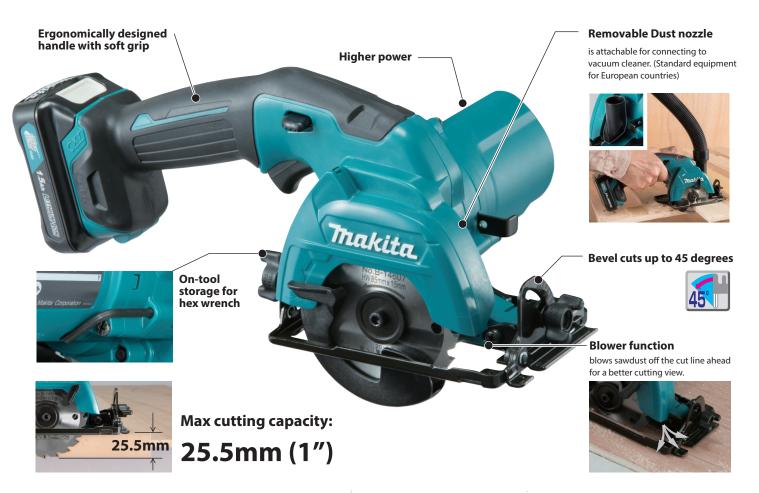

Li-ion Battery & Charger Time Reference, Compatibility Chart





Battery fuel gauge

(BL1020B, BL1040B)

The power remaining in the battery can be indicated in 4 stages simply by pushing a button.



Battery fuel gauge (4 stage LED)

Forced air cooling system

DC10SA only

- •Stand-by time until the charge starts can be greatly shortened by using charger DC10SA equipped with a built-in cooling fan.
- •Effectively cools down every battery cell with the forced air cooling system and the heat sinks.



Accessories

TCT Saw blade 85x15x1x20T Part No. B-14607



Plywood saw blade 85x15x0.5x50T Part No. 792299-8



Combination saw blade 85x15x0.5x50T

Part No. 792259-0



Cordless Circular Saw

Bevel Cutting 45 left

Dust Collecting
Carrying Case

Circular Saw HS301D 85mm (3-3/8")

Max cutting capacity

Blade diameter No load speed (rpm) Dimensions (L x W x H) Net weight* at 0 degrees: 25.5mm (1") at 45 degrees: 16.5mm (5/8") 85mm (3-3/8") 1,500 313x170x155mm (12-3/8"x6-11/16"x6-1/8") BL1015: 1.6kg (3.5lbs)

BL1040B: 1.8kg (3.9lbs)

Standard Equipment: TCT saw blade, Hex wrench, Dust nozzle, Battery, Battery cover, Charger

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan