



Angle Grinders


GA7020/ S, GA7021 180mm (7")

GA9020/ S 230mm (9")

Satisfy Professional's Needs



ROBUST CREATURE

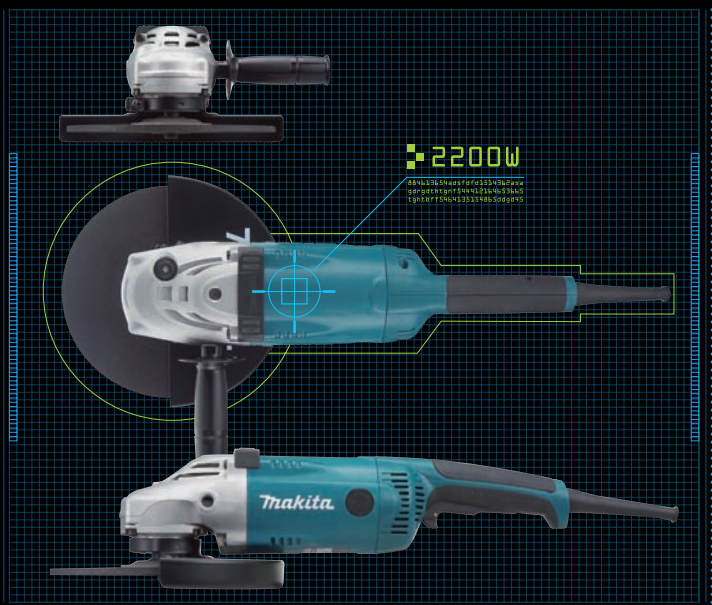


Heat Resisting Robust Creature 2,200W

Performance data


Efficiency of concrete cutting

Test conditions : Cut concrete to depth of 30 mm.

180mm Angle Grinder Models
Diameter of equipped wheel : 180 mm (7")



230mm Angle Grinder Models
Diameter of equipped wheel : 230 mm (9")



Numbers in the charts above are relative values when setting Competitor "B" capacity as 100. It may differ under some conditions.


Option

Wheel Guard



Standard equipment
180mm (7") Part No. 154674-0
230mm (9") Part No. 154672-4

Anti Vibration AVT Grip



Part No. 162240-9

Dust Collecting Wheel Guard Part No. 193002-4



Dust Covers Part No. 194289-1
protect motor from metal dust.





Angle Grinder

GA7020/ S, GA7021, GA9020/ S

204



-  Double Insulation
-  Soft start (GA7020S, GA9020S only)

	GA7020/ S	GA7021	GA9020/ S
Continuous rating Input	2,200W	2,200W	2,200W
Capacity Depressed center wheel:	180mm (7")	180mm (7")	230mm (9")
Wire cup brush:	110mm (4-3/8")	110mm (4-3/8")	110mm (4-3/8")
Cut-off wheel :	180mm (7")	180mm (7")	230mm (9")
No load speed	8,500 rpm	6,600 rpm	6,600 rpm
Dimensions (L x W x H)	473 x 200 x 140mm (18-5/8" x 7-7/8" x 5-1/2")	473 x 200 x 140mm (18-5/8" x 7-7/8" x 5-1/2")	473 x 249 x 140mm (18-5/8" x 9-3/4" x 5-1/2")
Net weight	4.7kg (10.4lbs)	4.7kg (10.4lbs)	4.7kg (10.4lbs)
Power supply cord	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)

Standard equipment : Lock Nut Wrench, Grip (Tool does not come with depressed center wheel)

Items of standard equipment and specifications may differ from country to country.



Makita Corporation

3-11-8, Sumiyoshi-cho, Anjo, Aichi 446-8502, Japan