



# Cordless Belt Sander BS001G



# 40V Li-ion max

**High power similar or superior to corded model**  
**Optimal weight balance reduces unevenness in sanding**



Belt size


**76 x 533 mm**






**Optimal weight balance**

The battery is positioned above the sanding belt on the front side of the tool so that the sanding pressure can be evenly applied to the sanding surface.

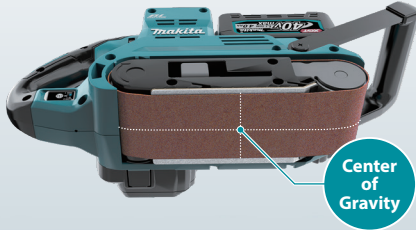

**Angle adjustable front handle**

Sanding to the edge of the wall is possible by fixing the front handle at 0 degrees vertically or 30 degrees to the rear.

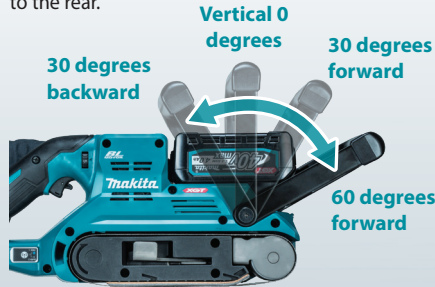

**Stationary use (Installed upside down)**

The tool has a flat surface on top of the housing, and it also can be used as a stationary belt sander by using the Clamp complete and Guide rule set (both of them are optional accessories).




**High power BL motor**



**Angle adjustable LED job light**

- Twin LEDs with afterglow function
- Adjustable angle: 45 degrees

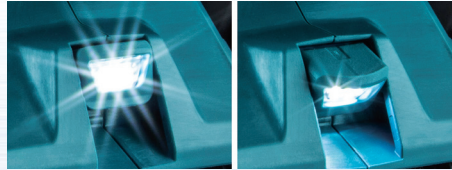

**Lock-on / Lock-off function**



**eXtreme Protection Technology**



**AWS Auto-start Wireless System**

Connects to compatible vacuum cleaners with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



**Dust bag with anti-drop feature**

We have adopted a new dust bag equipped with a lock mechanism. This keeps the dust bag from falling off due to its own weight when the tool is used vertically, such as when sanding walls.



**Variable speed control by dial**

Adjustable to five speeds according to the material or usage.



**Flush sanding (Front, right side)**

With the flat right side, it enables sanding along walls.



**Accessories**

**Clamp complete**

Part No. 192694-6



**Guide rule set**

Part No. 1915E3-1



**Sanding shoe set**

Part No. 193070-7



**Carbon plate**

Part No. 193197-3



**Cork rubber plate**

Part No. 193199-9



**Charging Time**

	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min

\*1 Recommended battery

**Cordless Belt Sander**

**BS001G**

Variable Speed	Belt size Belt speed	76 x 533 mm (3 x 21") 120 - 470 m/min (390-1,540 ft/min)
Constant Speed	Vibration level (EN62841-2-4) Vibration K Factor (EN62841-2-4)	Sanding metal plate: 2.5 m/s <sup>2</sup> or less Sanding metal plate: 1.5 m/s <sup>2</sup>
Dust Collection	Sound pressure level (EN62841-2-4) Sound power level (EN62841-2-4)	87 dB(A) 95 dB(A)
Built-in Job Light	Noise K factor (EN62841-2-4)	3 dB(A)
Anti-restart function	Dimensions (L x W x H)	440 x 148 x 165 mm (17-1/4 x 5-7/8 x 6-1/2")
Carrying Case	Dimensions (Battery) Net weight Net weight (Battery)	BL4040 4.5 - 5.1 kg (9.9 - 11.2 lbs.) BL4020 - BL4050F

Standard Equipment : Dust bag, Abrasive belt, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.  
Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

