



Cordless Impact Driver
DTD201

Satisfy Professional's Needs



High-speed, high-power for heavy-duty tasks



Max fastening torque

210 N·m

High-speed rotation

Max

3,700 min⁻¹



Enhanced hammer and spring with increased motor speed deliver superior fastening performance to our previous model.

Work efficiency*

DTD201

Our 18V model

160


100

*Drove coach screws (lag screws) with a length of 90mm and a diameter of 9.0mm into melapi.



4-stage impact power selection + T-mode (for thin metal sheets only)

Four selectable speed settings make it easy to adjust the tool for a wide range of applications.

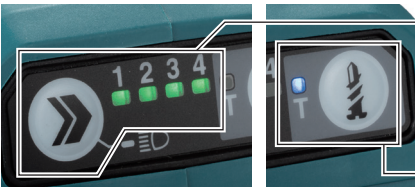

- 4-stages
- 4 (Max)
 - 3 (Hard)
 - 2 (Medium)
 - 1 (Soft)
- T-mode

XPT
eXtreme Protection Technology



Charging Time

	Fast Charging DC18RC	DC18SD
18V LITHIUM-ION		
*1BL1815N 1.5Ah	15 min	30 min
*1BL1820B 2.0Ah	24 min	45 min
*1BL1830B 3.0Ah	22 min	60 min
*1BL1840B 4.0Ah	36 min	90 min
*1BL1850B 5.0Ah	45 min	110 min
*1BL1860B 6.0Ah	55 min	130 min
BL1890 9.0Ah	85 min	200min
BL18120 12.0Ah	120min	265min
18V LITHIUM-ION	LXT BASIC	DCB18WA
Compatible with charger DCB18WA only		
BLB182 2.0Ah		90 min

*1 Recommended battery

Accessories

Tool hanger set

Part No. 191K57-9



Hook set

Part No. 194654-4



Battery protector set

Part No. 194649-7



Cordless Impact Driver		DTD201
Variable Speed	Capacity	Steel: 22 mm (7/8") / Wood (Auger bit): 24 mm (15/16")
Brake	Max fastening torque	210 N·m (1,860 in.lbs.)
Reversing	No load speed	Max / Hard / Med. / Soft: 0 - 3,700 / 0 - 3,200 / 0 - 2,100 / 0 - 1,100 min ⁻¹
Electronic 4-Speed	Impacts per minute	Max / Hard / Med. / Soft: 0 - 4,400 / 0 - 4,200 / 0 - 3,600 / 0 - 2,000 min ⁻¹
Built-in Job Light	Vibration level	9.9 m/s ² (EN62841-2-2, Mode: impact tightening with max. capacity)
Carrying Case	Vibration K factor	1.5 m/s ² (EN62841-2-2, Mode: impact tightening with max. capacity)
	Sound pressure level	97 dB (A) (EN62841-2-2)
	Sound power level	105 dB (A) (EN62841-2-2)
	Noise K factor	3 dB (A) (EN62841-2-2)
	Dimensions (L x W x H)	121 x 81 x 246 mm (4-3/4 x 3-3/16 x 9-11/16")
	(Battery)	BL1860B
	Net weight	1.3 - 2.3 kg (2.9 - 5.1 lbs.)
	(Battery)	BL1815N - BL18120
Standard Equipment :		Hook, Hand strap, Battery, Charger

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202510

www.makita.com