

Adaptable for various tasks with a wide range of accessories



Wood cutting



Cutout in the flooring



Creating openings



Wood sanding



Flush rebar cutting



Flush copper pipe cutting



PVC pipe cutting



Tile removal



Tile grout removal



Elastic sealant removal



Keeps the cutting depth constant, reducing the risk of damaging hidden objects.
Adjustment range: 0 - 50 mm

Cutting plasterboard



Keeps the cutting height constant, allowing cuts at the desired height without using a support block.
Adjustment range: 8 - 95 mm


Cutting finishing materials

**BL
MOTOR**

High-power brushless motor + constant speed control

The motor maintains its speed under load, allowing for stable work.


Work efficiency increased by
approx. 20 %
* Compared to our 18V model

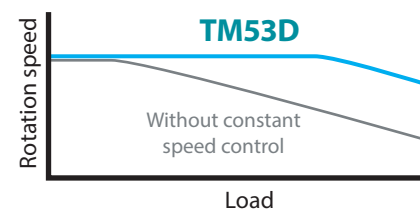


Slim, easy-to-hold grip

Comfortable handling with a 139 mm grip circumference

Slimmed down by
56 mm
in grip circumference
* Compared to our 18V model




STARLOCK
Compatible with
STARLOCK

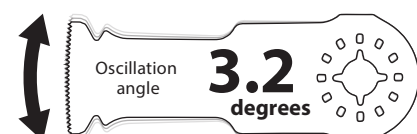

Max. oscillations per minute

20,000min⁻¹

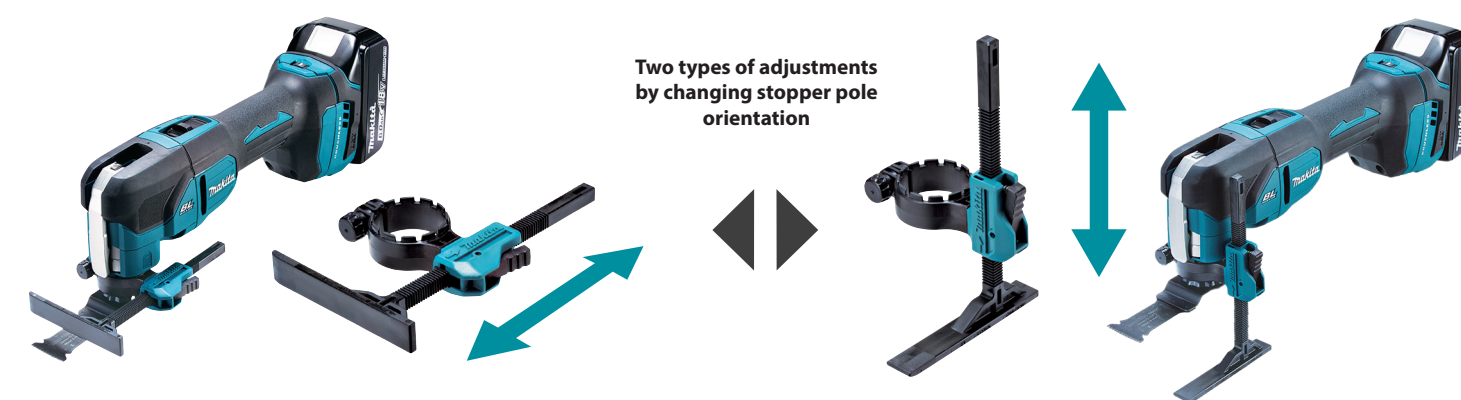

Depth gauge assembly set **Optional accessory**


Enables operation at the desired cutting depth or height.




Part No. 1916E4-5

Tool-less easy accessory change

1. Insert the holder bolt.
2. Close the lever to fix the accessory.

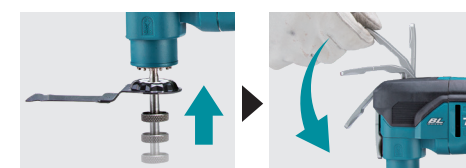

12 angle settings of accessory at every 30° from 0° to 360°



Dust attachment set **Optional accessory**

Enables dust collection during sanding by connecting a vacuum hose.



Part No. 1916E5-3

