

Satisfy Professional's Needs



Cordless Impact Driver DTD158



Easy-to Handle Basic Impact Driver



Max fastening torque

170 N·m

High-speed rotation

Max

3,400 min⁻¹

Lightweight at

1.6 kg

with BL1860B



Easy-to Handle Basic Impact Driver


Optimal battery location




High-power
brushless motor

The center of gravity has been moved closer to the center line of the grip, by locating the battery 12mm backward compared with the current model, reducing the strain on the wrist during operation.

DTD158

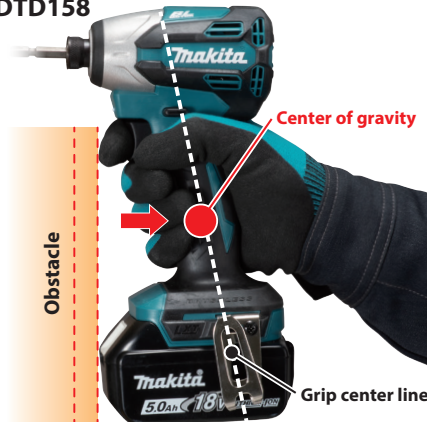

Current model

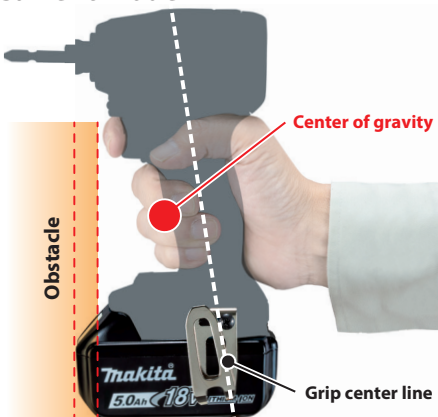


One-touch bit installation

No need to pull bit sleeve for bit installation

Built-in LED light

with preglow and afterglow functions illuminates the work area



Variable speed control by trigger

Ergonomically designed handle with soft grip

provides comfortable grip and more control while minimizing hand fatigue and pain.



eXtreme Protection Technology



Charging Time

| Battery Capacity | Fast Charging | |
|------------------|---------------|---------|
| | DC18RC | DC18SD |
| *BL1815N 1.5Ah | 15 min | 30 min |
| *BL1820B 2.0Ah | 24 min | 45 min |
| *BL1830B 3.0Ah | 22 min | 60 min |
| *BL1840B 4.0Ah | 36 min | 90 min |
| *BL1850B 5.0Ah | 45 min | 110 min |
| *BL1860B 6.0Ah | 55 min | 130 min |
| BL1890 9.0Ah | 85 min | 200 min |
| BL18120 12.0Ah | 120 min | 265 min |

| Battery Capacity | LXT BASIC | |
|------------------|-----------|--|
| | DCB18WA | |
| *BLB182 2.0Ah | 90 min | |

*1 Recommended battery

Accessories

Tool hanger set

Part No.
191K57-9



Hook set

Part No.
194654-4



Battery protector set

Part No.
194649-7



Cordless Impact Driver

DTD158

| | | |
|--------------------|-------------------------------|---|
| Variable Speed | Capacity | Machine screw : M4 - M8 (5/32" - 5/16"), Standard bolt : M5 - M16 (3/16" - 5/8") High strength bolt : M5 - M14 (3/16" - 9/16") Coarse thread (in length) : 22 - 125mm (7/8" - 4-7/8") |
| Brake | Max fastening torque | 170 N·m (1,500 ft.lbs.) |
| Reversing | Impacts per minute | 0 - 3,600 min ⁻¹ |
| Built-in Job Light | No load speed | 0 - 3,400 min ⁻¹ |
| Carrying Case | Vibration level | 10.9 m/s ² ; * Impact tightening of fasteners of the maximum capacity of the tool |
| | Uncertainty (K) for Vibration | 2.0 m/s ² * |
| | Sound pressure level | 97 dB (A)* |
| | Sound power level | 105 dB (A)* |
| | Noise K factor | 3 dB (A)* |
| | Dimensions (L x W x H) | 125 x 81 x 233 - 251 mm (4-7/8 x 3-3/16 x 9-1/8 - 9-7/8") |
| | (Battery) | (BLB182 - BL1860B) |
| | Net weight (Battery) | 1.3 - 1.6 kg (2.9 - 3.5 lbs.) (BLB182 - BL1860B) |

*EN62841-2-2
Standard Equipment :
Hook, Battery, Charger

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202601

www.makita.com