




Cordless Circular Saw DHS661/ DHS660 165 mm (6-1/2")



Photo : DHS661

Compact and Lightweight

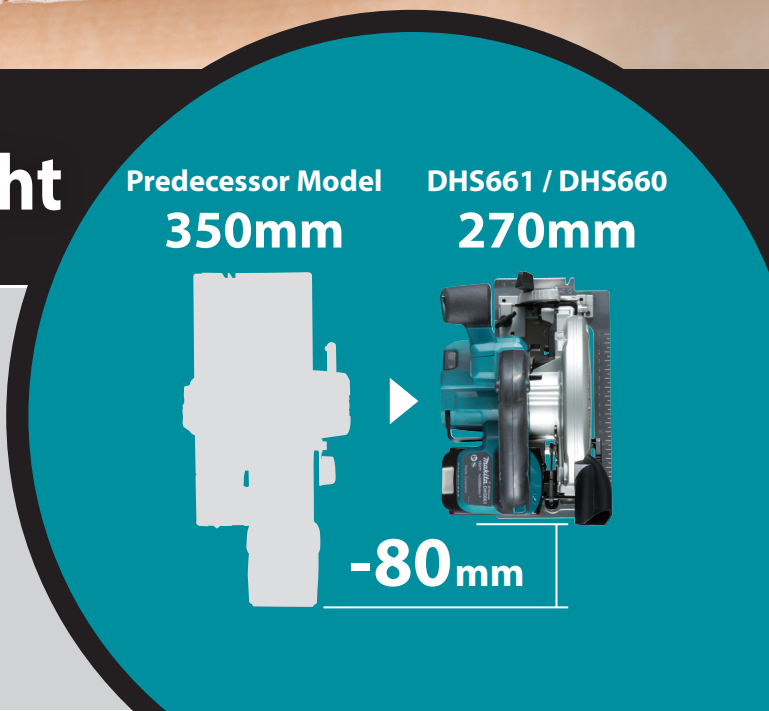

Predecessor Model 350mm
DHS661 / DHS660 270mm

-80mm

Compact with Only 270 mm (10-5/8") Length for Better Maneuverability

Net weight

2.9 kg

with BL1815N



Work amount

Test material:
SPF of 2 x 10 (38mm x 235mm)
Bevel angle: 0°
Battery: BL1850B
(on a single full battery charge)

200 cuts

Optional dust nozzle

is attachable for connecting to vacuum cleaner.




Rear dust exhaust port



Twin LED Job light



Blower function



Flat motor housing design

Increases stability when changing blades.




Bevel cuts up to 50 degrees



ADT Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

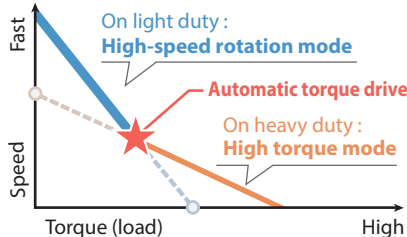

AWS Auto-start Wireless System (DHS661 only)

The wireless activation function enables clean and comfortable operation. By connecting a supported tool to the cleaner, you can run the cleaner automatically along with the switch operation of the tool.



Wireless unit is compatible with all supported tools

Bluetooth® AWS connects to power tool with Bluetooth

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

Accessories

Specialized EFFICUT blade



Size (mm)	Part No.
165 x 1.4 x 20 x 25T	B-62979
165 x 1.45 x 20 x 56T	B-57364

Guide rail adapter set

Part No.
199232-5



Tool hanger

Part No.
199231-7



Cordless Circular Saw

DHS661 / DHS660 165 mm (6-1/2")

Brake	Blade Diameter 165 mm (6-1/2")
Soft Start	Hole Diameter 15.88 / 20 mm (5/8" / 13/16")
Dust Collection	Max Cutting Capacity 90°: 57 mm (2-1/4"), 45°: 41 mm (1-5/8") 50°: 37 mm (1-7/16")
Built-in Job Light	No Load Speed (RPM) 5,000
Carrying Case	Vibration Level Cutting Wood: 2.5 m/s ² or less
	Sound Pressure Level 93 dB(A)
	Sound Power Level 104 dB(A)
	Dimensions (L x W x H) 270x186x250 mm (10-5/8"x7-3/8"x9-7/8")
	Net weight DHS661 : 2.9 - 3.2 kg (6.4 - 7.1 lbs.) DHS660 : 2.9 - 3.2 kg (6.3 - 7.0 lbs.)

Standard Equipment: TCT Saw Blade, Hex Wrench, Rip Fence (Guide Rule), Dust Nozzle (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201806